


neuro LIFTING SOCKET

neuro lifting socket offers extremely good load bearing quality especially on angled loads.

neuro socket require additional reinforcement to be channeled through the cross hole for transferring the force into the concrete.

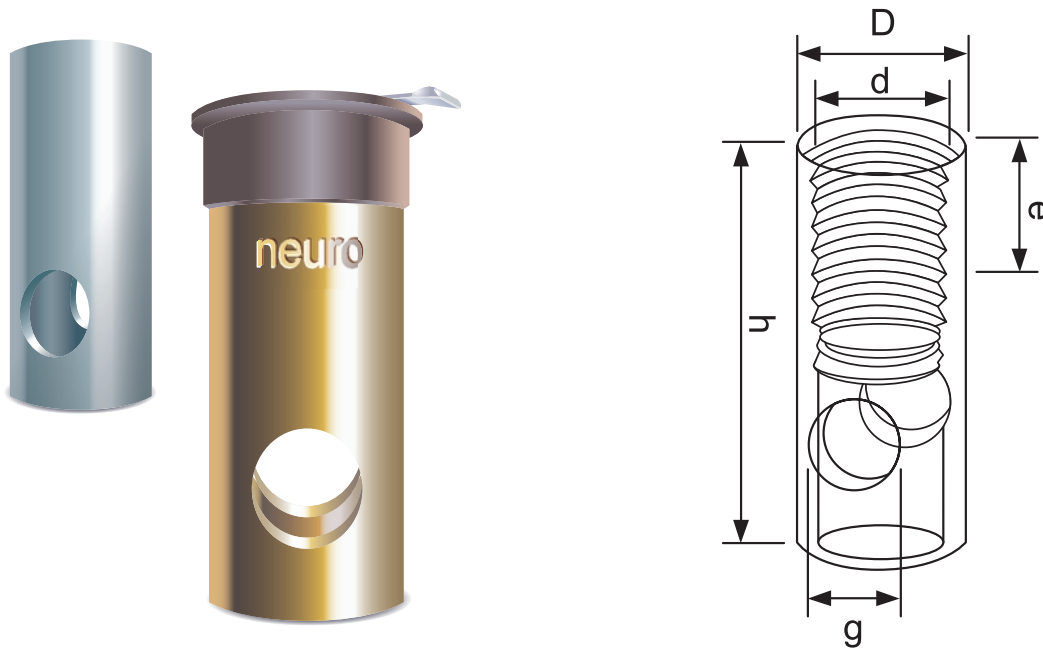

Manufactured from either high grade precision steel tube zinc plated or special stainless steel tube. The thread is finished in RD. (threaded end with metric gradient).

Description	Item No. zinc plated	Item No. hot dip galvanized	SWL kg	Dimensions / mm				Packing per box
				D	g	h	e	
Socket Rd 12	2030112040	2030412040	500	15	8	40	22	100
Socket Rd 14	2030114047	2030414047	800	18	10.5	47	25	100
Socket Rd 16	2030116054	2030416054	1200	21	13	54	27	100
Socket Rd 18	2030118065	2030418065	1600	24	13	65	34	100
Socket Rd 20	2030120069	2030420069	2000	28	15.5	69	35	100
Socket Rd 24	2030124078	2030424078	2500	31	18	78	43	100
Socket Rd 30	2030130103	2030430103	4000	40	22.5	103	56	50
Socket Rd 36	2030136125	2030436125	6300	47	27.5	125	68	25
Socket Rd 42	2030142145	2030442145	8000	54	32	145	80	20
Socket Rd 52	2030152195	2030452195	12500	67.2	40	195	100	10

SWL: Safe Working Load
Stainless Steel on request